




# 5370-00

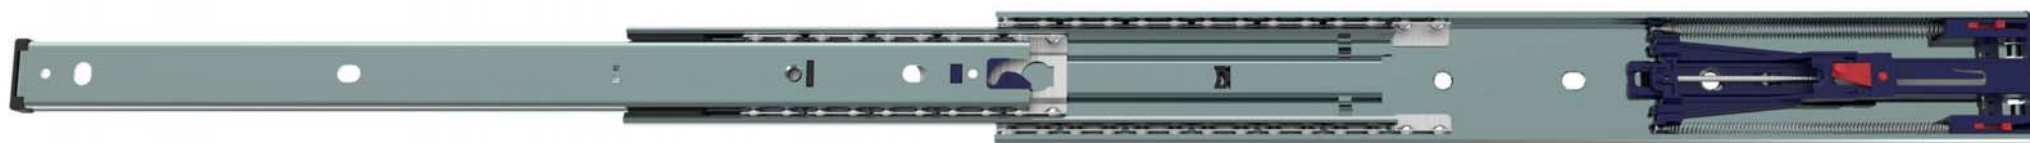


## SOFT-CLOSE DRAWER SLIDE For Metal Box Only.

<b>Mounting</b>	Side	<p style="text-align: center;">Profile</p>
<b>Side Clearance</b>	19.4mm +0.5/0	
<b>Height</b>	53mm	
<b>Soft-Closing Stroke</b>	16"-28"=55mm	
<b>Material</b>	Steel	
<b>Load Rating</b>	90kg at 18" (450mm)	
<b>Size</b>	16" to 28" (400mm to 700mm)	
<b>Travel</b>	Full Extension 18" to 28"	
<b>Disconnect</b>	Butterfly Release	
<b>Finish</b>	Electro-Zinc plated with clear, yellow or black chromate	

All Dimensions are in Millimeters (mm)

### Slide Dimensions

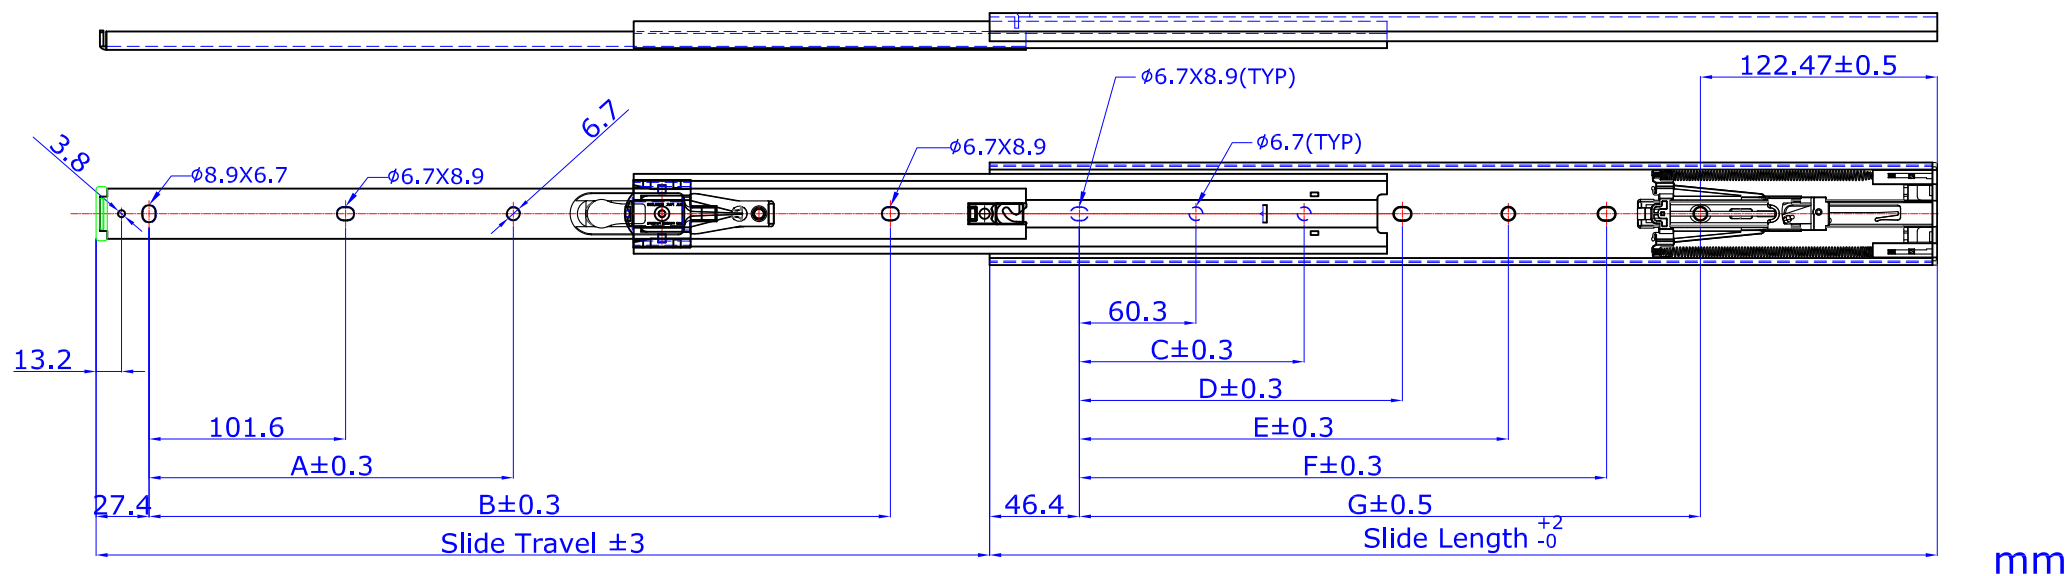

SIZE	Slide length	Slide Travel	Load Rating/Kg	A	B	C	D	E	F	G
16" (400)	400	375	80		317.5			127	177.8	231.2
18" (450)	450	450	90		355.6			177.8	228.6	281.2
20" (500)	500	502	95	228.6	406.4			228.6	279.4	331.2
22" (550)	550	550	100	228.6	457.2			279.4	330.4	381.2
24" (600)	600	600	90	228.6	508			330.2	381	431.2
26" (650)	650	650	90	228.6	558.8	228.6	279.4	381	431.8	481.2
28" (700)	700	700	90	228.6	584.2	228.6	279.4	431.8	482.6	531.2

To increase the spring tension (more closing force)

Use a slotted screwdriver to push adjustment pads ( $\Delta$ ) rearward as seen in the picture.



To decrease the tension (less closing force)

use a slotted screwdriver to push down on adjustment pads (RESET) and then pull forward as seen in picture.

