




4600-50



| | | |
|-----------------------|--|----------------|
| Mounting | Side | <p>Profile</p> |
| Side Clearance | 12.8mm +0.8/0 | |
| Height | 45.4mm | |
| Material | Steel | |
| Load Rating | 49kg at 14"(350mm) | |
| Size | 10"~28" | |
| Disconnect | Lever | |
| Finish | Electro-Zinc plated with clear, yellow or black chromate | |

All Dimensions are in Millimeters (mm)

Slide Dimensions

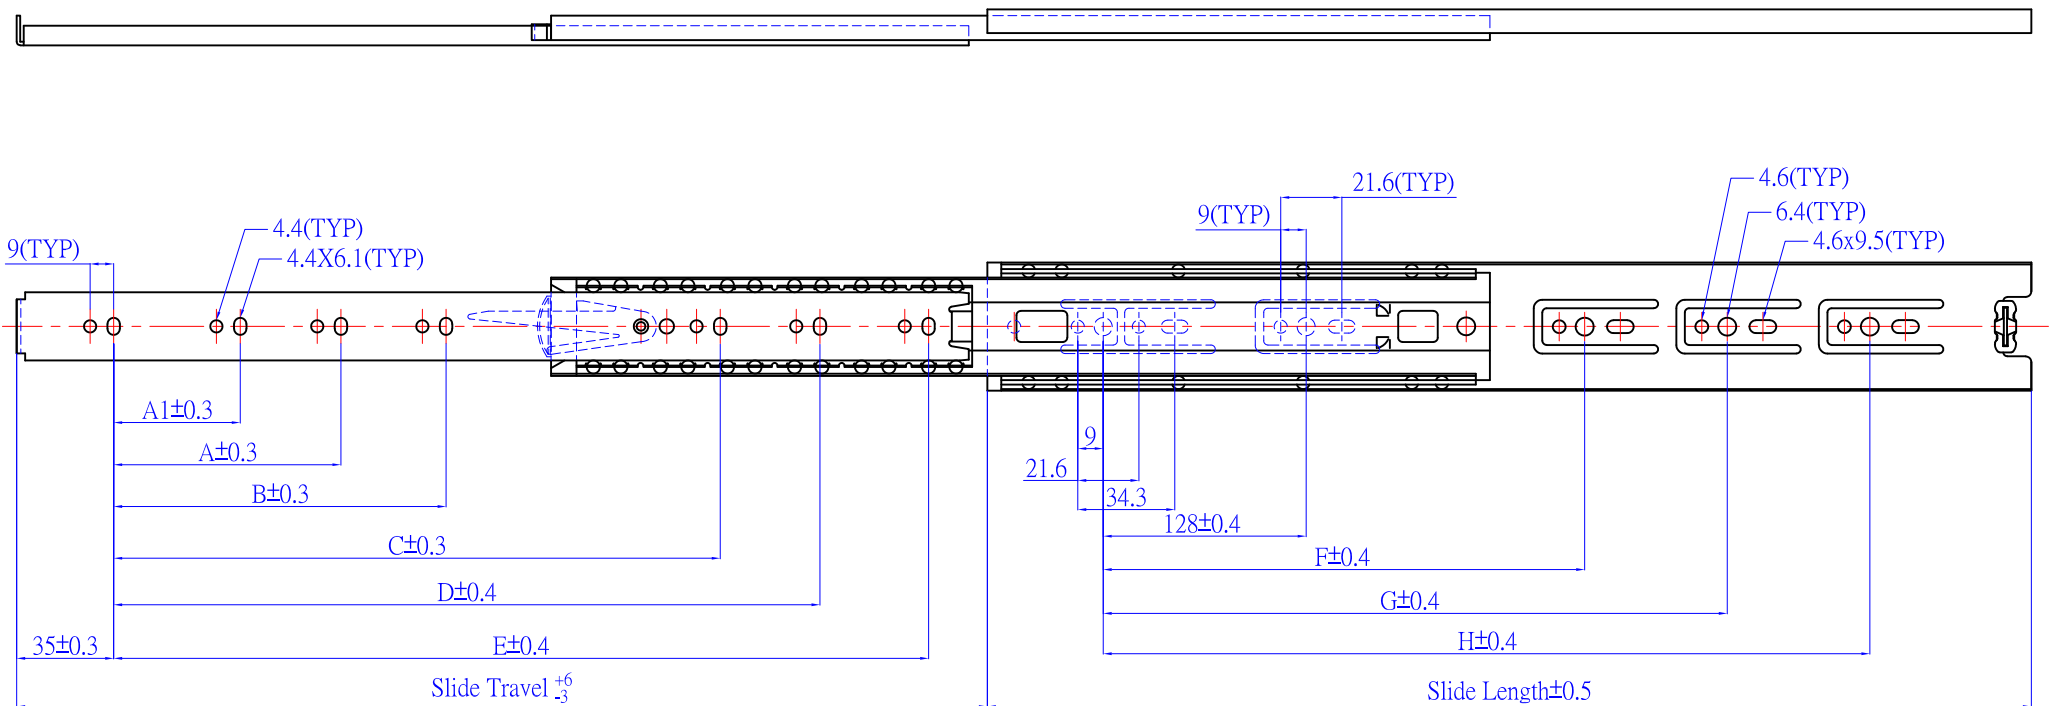

mm

| SIZE | Slide Length | Slide Travel | Load Rating/Kg | A1 | A | B | C | D | E | F | G | H |
|------|--------------|--------------|----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 10" | 250 | 254 | 31 | | | | | | 192 | | | |
| 12" | 300 | 305 | 47 | | | | | | 242 | 224 | | |
| 14" | 350 | 356 | 49 | 128 | | | | | 292 | 224 | | |
| 16" | 400 | 406 | 47 | 128 | | 320 | | | 342 | 224 | 320 | |
| 18" | 450 | 457 | 45 | 128 | | 320 | | | 392 | 224 | 352 | |
| 20" | 500 | 508 | 42 | 128 | 192 | 352 | | | 442 | 224 | 416 | |
| 22" | 550 | 559 | 40 | 128 | 224 | | 416 | | 492 | 224 | 352 | 448 |
| 24" | 600 | 610 | 38 | 128 | 224 | | 416 | | 542 | 224 | 352 | 480 |
| 26" | 650 | 660 | 36 | 128 | 224 | | 416 | 544 | 592 | 224 | 352 | 544 |
| 28" | 700 | 711 | 31 | 128 | 224 | 288 | 448 | 544 | 642 | 224 | 352 | 544 |